






LCMF 16 - CM

	CW	CWTOLL	CWTOLU	INSL
	[mm]	[mm]	[mm]	[mm]
0316	3.00	-0.05	0.05	16.4
0416	4.00	-0.05	0.05	16.4
0516	5.00	-0.05	0.05	16.4
0616	6.00	-0.05	0.05	16.4

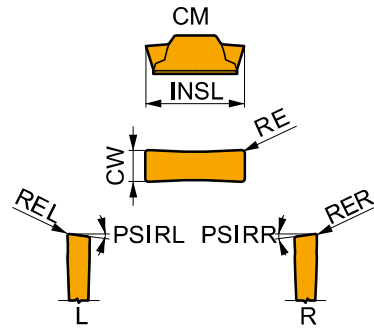



Suitability and starting values for cutting speed (vc), feed (f) and depth of cut (ap). Refer to our cutting conditions app for further options.

Product	RE [mm]	P		M		K		N		S		H		PSIRR [°]	PSIRL [°]
		vc [m/min]	f [mm/rev]	vc [m/min]	f [mm/rev]	vc [m/min]	f [mm/rev]	vc [m/min]	f [mm/rev]	vc [m/min]	f [mm/rev]	vc [m/min]	f [mm/rev]		




CM geometry, first choice for parting-off and grooving, and continuous to slightly interrupted cuts.

LCMF 031602-CM	T8330	0.2	130	0.11	75	0.10	120	0.11	-	-	-	-	-	-	-
LCMF 031604-CM	T8330	0.4	130	0.11	75	0.10	120	0.11	-	-	-	-	-	-	-
LCMF 041602-CM	T8330	0.2	130	0.11	75	0.10	120	0.11	-	-	-	-	-	-	-
LCMF 041604-CM	T8330	0.4	130	0.11	75	0.10	120	0.11	-	-	-	-	-	-	-
LCMF 051604-CM	T8330	0.4	130	0.11	75	0.11	120	0.11	-	-	-	-	-	-	-
LCMF 061604-CM	T8330	0.4	130	0.11	75	0.11	120	0.11	-	-	-	-	-	-	-



R-CM geometry, right-handed design, first choice for parting-off and continuous to slightly interrupted cuts.

LCMF 031602R15-CM	T8330 ¹⁾	0.2	130	0.11	75	0.10	120	0.11	-	-	-	-	15	-
LCMF 031602R6-CM	T8330	0.2	130	0.11	75	0.10	120	0.11	-	-	-	-	6	-
LCMF 041602R15-CM	T8330 ¹⁾	0.2	130	0.11	75	0.10	120	0.11	-	-	-	-	15	-
LCMF 041602R6-CM	T8330	0.2	130	0.11	75	0.10	120	0.11	-	-	-	-	6	-



L-CM geometry, left-handed design, first choice for parting-off and continuous to slightly interrupted cuts.

LCMF 031602L15-CM	T8330 ¹⁾	0.2	130	0.11	75	0.10	120	0.11	-	-	-	-	-	15
LCMF 031602L6-CM	T8330	0.2	130	0.11	75	0.10	120	0.11	-	-	-	-	-	6
LCMF 041602L15-CM	T8330 ¹⁾	0.2	130	0.11	75	0.10	120	0.11	-	-	-	-	-	15
LCMF 041602L6-CM	T8330	0.2	130	0.11	75	0.10	120	0.11	-	-	-	-	-	6


¹⁾ Toolholders have to be modified.



LCMF 16, LCMF 30 - F





	CW	CWTOLL	CWTOLU	INSL
	[mm]	[mm]	[mm]	[mm]
0316	3.00	-0.05	0.05	16.4
0416	4.00	-0.05	0.05	16.4
0516	5.00	-0.05	0.05	16.4
0616	6.00	-0.05	0.05	16.4
0830	8.00	-0.05	0.05	30.0




Suitability and starting values for cutting speed (vc), feed (f) and depth of cut (ap). Refer to our cutting conditions app for further options.

Product	RE	P			M			K			N			S			H		
		vc	f	ap	vc	f	ap	vc	f	ap	vc	f	ap	vc	f	ap	vc	f	ap
	[mm]	[m/min]	[mm/rev]	[mm]	[m/min]	[mm/rev]	[mm]	[m/min]	[mm/rev]	[mm]	[m/min]	[mm/rev]	[mm]	[m/min]	[mm/rev]	[mm]	[m/min]	[mm/rev]	[mm]



F geometry for parting-off, grooving and axial turning, fine and finish machining, and continuous to slightly interrupted cuts.

LCMF 031602-F	T8330	0.2	■	195	0.10	0.3	☑	115	0.09	0.3	☑	185	0.10	0.3	—	—	—	—	—	—
LCMF 031604-F	T8330	0.4	■	200	0.10	0.5	☑	120	0.09	0.5	☑	190	0.10	0.5	—	—	—	—	—	—
LCMF 041604-F	T8330	0.4	■	185	0.13	0.5	☑	110	0.12	0.5	☑	175	0.13	0.5	—	—	—	—	—	—
	T9325	0.4	■	275	0.13	0.5	☑	165	0.12	0.5	☑	260	0.13	0.5	—	—	—	—	—	—
LCMF 041608-F	T8330	0.8	■	205	0.13	1.0	☑	120	0.12	1.0	☑	190	0.13	1.0	—	—	—	—	—	—
	T9325	0.8	■	305	0.13	1.0	☑	180	0.12	1.0	☑	285	0.13	1.0	—	—	—	—	—	—
LCMF 051608-F	T8330	0.8	■	195	0.15	1.0	☑	115	0.14	1.0	☑	185	0.15	1.0	—	—	—	—	—	—
	T9325	0.8	■	285	0.15	1.0	☑	170	0.14	1.0	☑	270	0.15	1.0	—	—	—	—	—	—
LCMF 061608-F	T8330	0.8	■	190	0.17	1.0	☑	110	0.15	1.0	☑	180	0.17	1.0	—	—	—	—	—	—
	T9325	0.8	■	270	0.17	1.0	☑	160	0.15	1.0	☑	255	0.17	1.0	—	—	—	—	—	—



F geometry for parting-off, grooving and axial turning, fine and finish machining, and continuous to slightly interrupted cuts.


LCMF 083008-F	T8330	0.8	■	175	0.25	1.0	☑	105	0.23	1.0	☑	165	0.25	1.0	—	—	—	—	—	—
LCMF 083012-F	T8330	1.2	■	170	0.25	1.5	☑	100	0.23	1.5	☑	160	0.25	1.5	—	—	—	—	—	—



LCMF 16 - M




	CW	CWTOLL	CWTOLU	INSL
	[mm]	[mm]	[mm]	[mm]
0316	3.00	-0.05	0.05	16.4
0416	4.00	-0.05	0.05	16.4
0516	5.00	-0.05	0.05	16.4
0616	6.00	-0.05	0.05	16.4



Suitability and starting values for cutting speed (vc), feed (f) and depth of cut (ap). Refer to our cutting conditions app for further options.

Product	RE	P			M			K			N			S			H		
		vc	f	ap	vc	f	ap	vc	f	ap	vc	f	ap	vc	f	ap	vc	f	ap
	[mm]	[m/min]	[mm/rev]	[mm]	[m/min]	[mm/rev]	[mm]	[m/min]	[mm/rev]	[mm]	[m/min]	[mm/rev]	[mm]	[m/min]	[mm/rev]	[mm]	[m/min]	[mm/rev]	[mm]




M geometry for grooving and longitudinal turning, and continuous to interrupted cuts.

LCMF 031602-M	T8330	0.2	160	0.13	1.0	95	0.12	1.0	150	0.13	1.0	-	-	-	30	0.15	1.0
LCMF 031604-M	T8330	0.4	170	0.13	1.0	100	0.12	1.0	160	0.13	1.0	-	-	-	30	0.15	1.0
LCMF 041604-M	T8330	0.4	155	0.18	1.0	90	0.16	1.0	145	0.18	1.0	-	-	-	30	0.15	1.0
	T9325	0.4	225	0.18	1.0	135	0.16	1.0	210	0.18	1.0	-	-	-	-	-	-
LCMF 041608-M	T8330	0.8	185	0.18	1.0	110	0.16	1.0	175	0.18	1.0	-	-	-	35	0.15	1.0
	T9325	0.8	265	0.18	1.0	155	0.16	1.0	250	0.18	1.0	-	-	-	-	-	-
LCMF 051608-M	T8330	0.8	180	0.20	1.0	105	0.18	1.0	170	0.20	1.0	-	-	-	35	0.15	1.0
	T9325	0.8	255	0.20	1.0	150	0.18	1.0	240	0.20	1.0	-	-	-	-	-	-
LCMF 061608-M	T8330	0.8	175	0.25	1.0	105	0.23	1.0	165	0.25	1.0	-	-	-	35	0.15	1.0
	T9325	0.8	230	0.25	1.0	135	0.23	1.0	215	0.25	1.0	-	-	-	-	-	-

LCMF 16, LCMF 30 - MP




	CW	CWTOLL	CWTOLU	INSL
	[mm]	[mm]	[mm]	[mm]
0316	3.00	-0.05	0.05	17.5
0416	4.00	-0.05	0.05	17.6
0516	5.00	-0.05	0.05	18.3
0616	6.00	-0.05	0.05	18.5
0830	8.00	-0.05	0.05	30.9



Suitability and starting values for cutting speed (vc), feed (f) and depth of cut (ap). Refer to our cutting conditions app for further options.

Product	RE	P			M			K			N			S			H		
		vc	f	ap	vc	f	ap	vc	f	ap	vc	f	ap	vc	f	ap	vc	f	ap
	[mm]	[m/min]	[mm/rev]	[mm]	[m/min]	[mm/rev]	[mm]	[m/min]	[mm/rev]	[mm]	[m/min]	[mm/rev]	[mm]	[m/min]	[mm/rev]	[mm]	[m/min]	[mm/rev]	[mm]




MP geometry for longitudinal turning and copy profiling, and continuous to interrupted cuts.

LCMF 0316M0-MP	T8330	1.5	190	0.30	0.8	110	0.27	0.8	180	0.30	0.8	-	-	-	-	-	-
LCMF 0416M0-MP	T8330	2.0	175	0.40	1.0	105	0.36	1.0	165	0.40	1.0	-	-	-	-	-	-
	T9325	2.0	220	0.40	1.0	130	0.36	1.0	205	0.40	1.0	-	-	-	-	-	-
LCMF 0516M0-MP	T8330	2.5	170	0.45	1.0	100	0.41	1.0	160	0.45	1.0	-	-	-	-	-	-
	T9325	2.5	205	0.45	1.0	120	0.41	1.0	190	0.45	1.0	-	-	-	-	-	-



Suitability and starting values for cutting speed (vc), feed (f) and depth of cut (ap). Refer to our cutting conditions app for further options.

Product	RE (mm)	P			M			K			N			S			H		
		vc [m/min]	f [mm/rev]	ap [mm]	vc [m/min]	f [mm/rev]	ap [mm]	vc [m/min]	f [mm/rev]	ap [mm]	vc [m/min]	f [mm/rev]	ap [mm]	vc [m/min]	f [mm/rev]	ap [mm]	vc [m/min]	f [mm/rev]	ap [mm]




MP geometry for longitudinal turning and copy profiling, and continuous to interrupted cuts.

LCMF 0616MO-MP	T8330	3.0	165	0.50	1.0	95	0.45	1.0	155	0.50	1.0	-	-	-	-	-	-	-
	T9325	3.0	200	0.50	1.0	120	0.45	1.0	190	0.50	1.0	-	-	-	-	-	-	-
LCMF 0830MO-MP	T8330	4.0	150	0.60	1.2	90	0.54	1.2	140	0.60	1.2	-	-	-	-	-	-	-

LCMR 16 - CM




	CW (mm)	CWTOLL (mm)	CWTOLU (mm)	INSL (mm)
0316	3.00	-0.05	0.05	16.4
0416	4.00	-0.05	0.05	16.4



Suitability and starting values for cutting speed (vc) and feed (f). Refer to our Machining Calculator app for further calculations.

Product	RE (mm)	P		M		K		N		S		H		PSIRR [°]	PSIRL [°]
		vc [m/min]	f [mm/rev]	vc [m/min]	f [mm/rev]	vc [m/min]	f [mm/rev]	vc [m/min]	f [mm/rev]	vc [m/min]	f [mm/rev]				




CM geometry, first choice for parting-off and grooving, and continuous to slightly interrupted cuts.

LCMR 031602-CM	T8330	0.2	130	0.11	75	0.10	120	0.11	-	-	-	-	-	-	-
LCMR 041604-CM	T8330	0.4	130	0.11	75	0.10	120	0.11	-	-	-	-	-	-	-





LCMR 16, LCMR 30 - F

	CW	CWTOLL	CWTOLU	INSL
	[mm]	[mm]	[mm]	[mm]
0316	3.00	-0.05	0.05	16.4
0416	4.00	-0.05	0.05	16.4
0516	5.00	-0.05	0.05	16.4
0616	6.00	-0.05	0.05	16.4
0830	8.00	-0.05	0.05	30.0




Suitability and starting values for cutting speed (vc), feed (f) and depth of cut (ap). Refer to our Machining Calculator app for further calculations.

Product	RE	P			M			K			N			S			H		
		vc	f	ap	vc	f	ap	vc	f	ap	vc	f	ap	vc	f	ap	vc	f	ap
	[mm]	[m/min]	[mm/rev]	[mm]	[m/min]	[mm/rev]	[mm]	[m/min]	[mm/rev]	[mm]	[m/min]	[mm/rev]	[mm]	[m/min]	[mm/rev]	[mm]	[m/min]	[mm/rev]	[mm]



F geometry for parting-off, grooving and longitudinal turning, fine and finish machining, and continuous to slightly interrupted cuts.

LCMR 031604-F	T8330	0.4	200	0.10	0.5	120	0.09	0.5	190	0.10	0.5	-	-	-	-	-	-	-	-
LCMR 041604-F	T8330	0.4	185	0.13	0.5	110	0.12	0.5	175	0.13	0.5	-	-	-	-	-	-	-	-
LCMR 051604-F	T8330	0.4	180	0.15	0.5	105	0.14	0.5	170	0.15	0.5	-	-	-	-	-	-	-	-
LCMR 061608-F	T8330	0.8	190	0.17	1.0	110	0.15	1.0	180	0.17	1.0	-	-	-	-	-	-	-	-




F geometry for parting-off, grooving and longitudinal turning, fine and finish machining, and continuous to slightly interrupted cuts.

LCMR 083008-F	T8330	0.8	175	0.25	1.0	105	0.23	1.0	165	0.25	1.0	-	-	-	-	-	-	-	-
---------------	-------	-----	-----	------	-----	-----	------	-----	-----	------	-----	---	---	---	---	---	---	---	---


LCMR 16 - M

	CW	CWTOLL	CWTOLU	INSL
	[mm]	[mm]	[mm]	[mm]
0316	3.00	-0.05	0.05	16.4
0416	4.00	-0.05	0.05	16.4
0516	5.00	-0.05	0.05	16.4
0616	6.00	-0.05	0.05	16.4



Suitability and starting values for cutting speed (vc), feed (f) and depth of cut (ap). Refer to our Machining Calculator app for further calculations.

Product	RE	P			M			K			N			S			H		
		vc	f	ap	vc	f	ap	vc	f	ap	vc	f	ap	vc	f	ap	vc	f	ap
	[mm]	[m/min]	[mm/rev]	[mm]	[m/min]	[mm/rev]	[mm]	[m/min]	[mm/rev]	[mm]	[m/min]	[mm/rev]	[mm]	[m/min]	[mm/rev]	[mm]	[m/min]	[mm/rev]	[mm]




M geometry for grooving and longitudinal turning, and continuous to interrupted cuts.

LCMR 031604-M	T8330	0.4	170	0.13	1.0	100	0.12	1.0	160	0.13	1.0	-	-	-	-	-	-	30	0.15	1.0
LCMR 041604-M	T8330	0.4	155	0.18	1.0	90	0.16	1.0	145	0.18	1.0	-	-	-	-	-	-	30	0.15	1.0
LCMR 051604-M	T8330	0.4	150	0.20	1.0	90	0.18	1.0	140	0.20	1.0	-	-	-	-	-	-	30	0.15	1.0
LCMR 061608-M	T8330	0.8	175	0.25	1.0	105	0.23	1.0	165	0.25	1.0	-	-	-	-	-	-	35	0.15	1.0




LCMR 16 - MP

	CW	CWTOLL	CWTOLU	INSL
	[mm]	[mm]	[mm]	[mm]
0316	3.00	-0.05	0.05	17.4
0416	4.00	-0.05	0.05	17.5
0516	5.00	-0.05	0.05	18.1
0616	6.00	-0.05	0.05	18.3



Suitability and starting values for cutting speed (vc), feed (f) and depth of cut (ap). Refer to our Machining Calculator app for further calculations.

Product	RE	P			M			K			N			S			H		
		vc	f	ap	vc	f	ap	vc	f	ap	vc	f	ap	vc	f	ap	vc	f	ap
	[mm]	[m/min]	[mm/rev]	[mm]	[m/min]	[mm/rev]	[mm]	[m/min]	[mm/rev]	[mm]	[m/min]	[mm/rev]	[mm]	[m/min]	[mm/rev]	[mm]	[m/min]	[mm/rev]	[mm]



MP geometry for longitudinal turning and copy profiling, and continuous to interrupted cuts.

LCMR 0316MO-MP	T8330	1.5	190	0.30	0.8	110	0.27	0.8	180	0.30	0.8	-	-	-	-	-	-	-	-
LCMR 0416MO-MP	T8330	2.0	175	0.40	1.0	105	0.36	1.0	165	0.40	1.0	-	-	-	-	-	-	-	-
LCMR 0516MO-MP	T8330	2.5	170	0.45	1.0	100	0.41	1.0	160	0.45	1.0	-	-	-	-	-	-	-	-
LCMR 0616MO-MP	T8330	3.0	165	0.50	1.0	95	0.45	1.0	155	0.50	1.0	-	-	-	-	-	-	-	-